

CPM Europe.

Assisting you with the
optimal pelleting solution



The best
pellet
qualities



GLOBAL PARTNER
SINCE 1883



CPM Europe. Your Partner in Productivity

We can assist you in selecting the optimal Pellet Mill size.

CPM 2016-4



90 kW

CPM 3020-6



132 kW

CPM 7726-7



200 kW




Remote roller adjustment by the Lineator

- The lineator features mechanical components in the die cavity area only
- Adjusting the rollers without stopping the pellet mill



Anti blocking system by roll speed measurement

- No production stops due to a temporary Pellet Mill overload

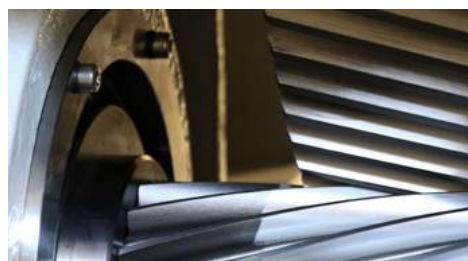


The die is directly connected with the main motor by a single helical gear reduction set

- No production stops due to a temporarily Pellet Mill overload
- Very efficient transfer of energy
- Compact design
- Closed loop oil lubrication system applying food grade lubricants
- Typical service life oil seals: 3 years
- Our gears are warranted for life

CPM knife concept

1. Die
2. Rollers
3. Product compression point
4. Product layer
5. Knife
6. Warm pellets cut to size

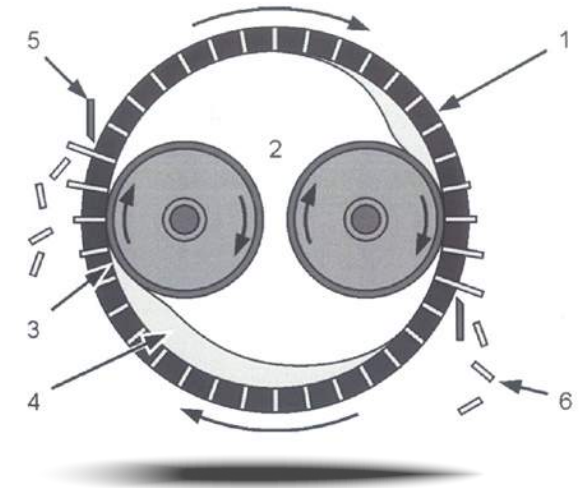

CPM 7936-12



400 kW

CPM 9042-12



500 kW

Please consult with the CPM specialists to study your pellet quality and pelleting capacity requirements



CPM Europe. Your partner in Productivity

The various available CPM Pellet Mill series

Pellet mill series	Pellet mill type	Die diameter ø (mm)	Die width (mm)	Die surface (cm ²)	Motor 1500 rpm Pmax (kW)	Die speed (rpm)	Die linear speed (m/sec)
2000	2016-2	407	57	729	90	212 / 272	4,5 / 5,7
	2016-3	407	83	1061	90	212 / 272	4,5 / 5,7
	2016-4	407	116	1483	90	212 / 272	4,5 / 5,7
3000	3020-4	508	113	1803	132	210 / 270	5,6 / 7,2
	3020-6	508	156	2490	132	210 / 270	5,6 / 7,2
	3022-2.5	572	60	1078	90	210 / 270	6,3 / 8,1
	3022-6	572	156	2803	160	210 / 270	6,3 / 8,1
7700	7722-2.5	572	60	1078	160	150 / 210	4,5 / 6,3
	7722-6	572	156	2800	160	150 / 210	4,5 / 6,3
	7722-7	572	180	3230	160	150 / 210	4,5 / 6,3
	7726-7	673	180	3806	200	150 / 210	5,3 / 7,4
	7726-9	673	240	5070	220	210	7,4
	7730-4	762	94	2250	200	150 / 210	5,9 / 8,3
	7730-6	762	156	3734	200	150 / 210	5,9 / 8,3
	7730-8	762	210	5027	200	150 / 210	5,9 / 8,3
	7930-4	762	94	2250	315	150 / 210	5,9 / 8,3
	7930-6	762	156	3734	315	150 / 210	5,9 / 8,3
7900	7930-8	762	210	5027	315	150 / 210	5,9 / 8,3
	7932-5	825	115	2980	355	150 / 210	6,4 / 9,0
	7932-7	825	180	4665	355	150 / 210	6,4 / 9,0
	7932-9	825	240	6220	355	150 / 210	6,4 / 9,0
	7932-11	825	275	7127	355	150 / 210	6,4 / 9,0
	7936-7	915	180	5170	355	150 / 210	7,1 / 10,0
	7936-12	915	313	9000	400	150 / 210	7,1 / 10,0
	7936-14	915	356	10.230	400	150 / 210	7,1 / 10,0
	9042-12	1057	301	10.000	500	125 / 170	6,9 / 9,6
9000	9042-12	1057	301	10.000	500	125 / 170	6,9 / 9,6

Contact us to receive your genuine CPM parts at the best price and delivery conditions



CPM EUROPE BV

Rijder 2
1507 DN Zaandam
The Netherlands

+31 (0) 75 65 12 611

Info@cpmeurope.nl
www.cpmeurope.nl

CPM Europe. Your Partner in Productivity